

# RTD WITH INTEGRAL PC PROGRAMMABLE TRANSMITTER




## RTD with 4-20 mA INTEGRAL OUTPUT (RTD in, 4-20 mA out)

INDUSTRIAL STYLE INTEGRAL TRANSMITTER (Transmitter option see page 3-2, #14, 8M)

### FEATURES:




- PC programmable
- Carry a 4-20 mA to your PLC directly from the RTD with no special equipment.
- Available in fixed immersion and spring loaded for thermowells!!
- Quick-n-Clean M12 connection for easy replacement.
- NEMA 6P (IP67) rated with M12 connector.
- Ideal for most applications from -60 to 320°F.
- Ambient temperature limits -40 to 185°F.

**Ideal for high moisture environments!**

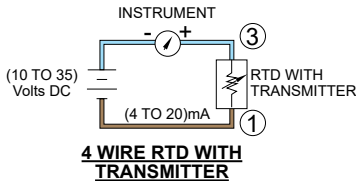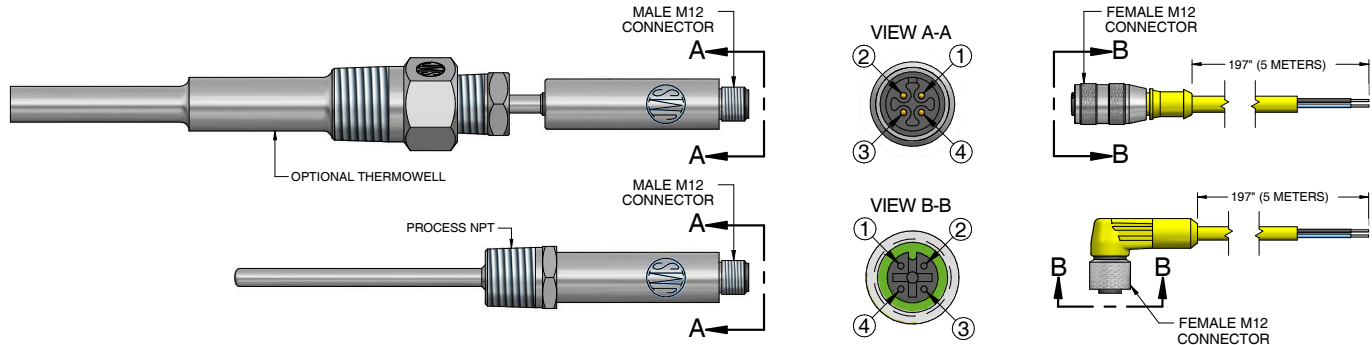

JMS PART #	DESCRIPTION
6SKWT*	M12 CORDSET, 4 POLE, FEMALE, STRAIGHT, IP67, 197" (5 METER) LENGTH
6RKWT*	M12 CORDSET, 4 POLE, FEMALE, RIGHT ANGLE, IP67, 197" (5 METER) LENGTH

**\*Add an X to the end of the part # to specify a custom cord length.**



W. T. Maye, Inc. (WTMI) / 1-877-705-9864  
info@wtmi-usa.com / www.wtmi-usa.com