


# INDUSTRIAL AND MINIATURE THERMOCOUPLES

#1	DESCRIPTION [6, 7]
1	Thermocouple
#2	TYPE [8,9,10]
	J,T,K,E,N,X (Other, Specify)
#3	LIMITS OF ERROR/ELEMENT CONSTRUCTION
1	Standard Single 6 Standard Triple
2	Standard Dual X Other, specify
3	Special Single
4	Special Dual

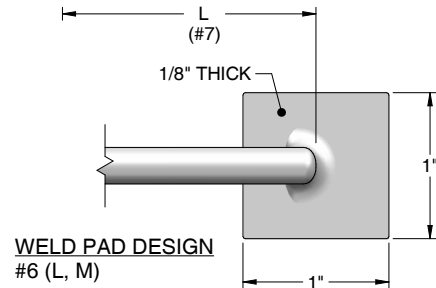

WELD PAD DESIGN #6 (L, M)

Many more options available at [JMS-SE.com](http://JMS-SE.com)


**Note:** For hollow tube sensors or sensors requiring a factory bend, see pages 2-1 and 2-2.

[ ] Brackets indicate page numbers where additional helpful information can be found in technical catalog. Now available online at [www.JMS-SE.com/TechnicalCatalog](http://www.JMS-SE.com/TechnicalCatalog)

#4	OUTSIDE DIAMETER [1-11]			CONDUCTOR SIZE (FOR BASE METALS ONLY)							
	OD	Single	Dual	OD	Single	Dual	OD	Single	Dual		
P	1/2"	10	12	R	6mm	16	18	F	1/25"	32	34
A	3/8"	13	16	C	3/16"	19	20	X*	Other, specify		
Y	5/16"	14	16	D	1/8"	22	24	*JMS now offers sheath as small as 0.010" diameter			
B	1/4"	16	18	E	1/16"	28	30				


#5	SHEATH MATERIAL [11]	MAX °F [2-8, 4-17]	MAX °F
H	304 stainless steel	1650	C Teflon coated stainless steel 400
J	310 stainless steel	2100	S Titanium 400
V	STABALOY	2220	Q Hastelloy C-276 800
K	316 stainless steel	1650	P Pyrosil 2300
M	Inconel 600	2100	X Other, specify

REDUCED TIP DESIGN #6 (P,Y)

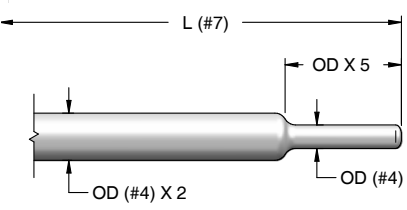

#6	MEASURING JUNCTION [1-12, 13, 14, 15]		
G	Grounded	P Reduced tip, grounded	
U	Ungrounded	Y Reduced tip, ungrounded	
E	Exposed (isolated on dual/triple)	R Gas/air, exposed	
I	Isolated	S Gas/air, grounded	
J	Pointed tip, grounded 45°	T Gas/air, ungrounded	
K	Pointed tip, ungrounded 45°	V* Enlarged tip, grounded	
L	Weld pad, grounded (Flat)	W* Enlarged tip, ungrounded	
M	Weld pad, ungrounded (Flat)	X Other, specify	
N	Weld pad, removable grounded	*Provide length and enlarged diameter description when selecting these options.	
O	Weld pad, removable ungrounded	<b>Note:</b> For options N, NF, O, & OF Fastrax (aka removable weld pad) designs, refer to 4-11.	
NF	Removable, "foot" only, grounded		
OF	Removable, "foot" only, ungrounded		


#7	LENGTH (See illustrations on page 1-1 through 1-3 for lengths)
"	Length in Inches (Lengths greater than 90" may be coiled for shipment)

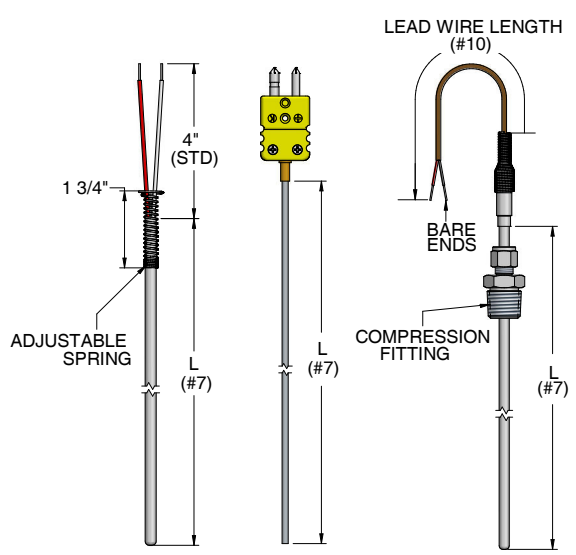

**Note:** L is the overall length of the sensor to the transition, wire, plug, head, or fixed attaching device. L excludes non-fixed attaching devices.

**NEW** Skip to page 1-3 to complete selection #8 if your sensor requires a nipple and/or union extension.

#8	STANDARD INDUSTRIAL ATTACHING DEVICE [1-3, 6-13]	
X	Other, specify	
Z	N/A	No attaching device
G	Single thread (process)	Welded design
F	Single thread (reversed)	
W	Double threaded	
H*	SS w/ SS ferrule	Compression design
I*	SS w/ Teflon ferrule	
J*	SS w/ Lava ferrule	
K*	SS w/ Nylon ferrule	
L*	Brass w/ Brass ferrule	
D	Single threaded (process)	Spring-loaded design
C	Double threaded w/ oil seal	
A	Double w/ threaded retainer	
E	Adjustable spring	
S	Double threaded (most common)	
B	Double threaded Bayonet	
BS*	Double threaded Bayonet w/ oil seal	
BD	Single threaded Bayonet	
BDS*	Single threaded Bayonet w/ oil seal	



SEE PAGE 1-3

# INDUSTRIAL AND MINIATURE THERMOCOUPLES

#9	PROCESS CONNECTION SIZE & TYPE [1-3]	Note: Threaded bushing may be used for sizes larger than 1/2" NPT			
L	1/8" NPT	O	3/4" NPT	X	Other, specify N/A
M	1/4" NPT	J	1" NPT	Z	
A	3/8" NPT	T	1 1/4" NPT		
P	1/2" NPT (Standard) w/ symbols W,S,C, & N from selection #8	Y	1 1/2" NPT		

#10	LEAD WIRE TYPE & LENGTH IN INCHES [SEE SECTION 7]			
Z	No lead wires	7"	Bare wire (AWG per #4)	Solid 20 AWG
1"	Fiberglass braid	8"	PVC coil cord (Relaxed length) (4" standard length for in head bayonet sensors)	
2"	PVC	S9"	Teflon ultra premium Type T, stranded 22 AWG	
3"	Teflon	X"	Other, specify	
4"	Hi-temp fiberglass braid			
5"	Kapton			

Note: Add an S prefix to your selection to designate stranded wire. Preferred for high vibration applications with lead wires > 6". Example: S312= 12" stranded Teflon lead wire. 24 AWG or smaller may be used to accommodate some smaller diameters and flex armor extensions.

#11	ARMOR OR HEAT SHRINK [7-7,16]			A special armor adapter is used when flex armor is longer than 60".
A	SS flex armor	J	Aluminum mylar shielded and jacketed to match primary insulation	
B	SS flex armor teflon coated white	Z	N/A	
C	SS flex armor teflon coated black	K	SS overbraid, drain, & yellow Teflon jacket overall, 20 AWG stranded (Type K only)	
D	Small 1/8" ID SS flex armor	X	Other, specify	
F	SS overbraid			
G	Heat shrink/sleeving			
H	Jacket to match primary insulation			


#12	TYPE OF TRANSITION [1-16]		
H	Heat shrink	<b>Note:</b> For high humidity/moisture environments (< 500°F), put a 2 after your selection. For example, R2.  <b>Note:</b> For high temperatures at the transition area (500°F - 1200°F), put a 3 after your selection. For example, T3.	
S	Size on size		
T	3/8" OD (Standard)		
R	1/4" OD		
X	Other, specify		
Z	No transition		

#13	COLD END TERMINATION Choose as many as applicable (Additional options see Pg. 1-7) (Visit our online catalog for additional terminations, <a href="http://www.JMS-SE.com/ends">www.JMS-SE.com/ends</a> )			
Connectors		Heads [6-1] visit <a href="http://www.JMS-SE.com/headspecs">www.JMS-SE.com/headspecs</a>		
B	Miniature plug	Exp. Proof	I	Aluminum, NEMA 4X, FM, CSA, IP68 (6IA)
C	Standard plug		J	316 SS, NEMA 4X, FM, CSA, IP68 (6ISS)
F	High temperature plug (< 800°F)		P	Aluminum, NEMA 4X, FM, CSA, ATEX, IECEx, IP68 (6IAIEC)
WM	Microphone style plug (6DA)		SI	Cast Iron, NEMA 4, UL, CSA (6I)
D	Miniature jack			
E	Standard jack			
G	High temperature jack (<800°F)			
WF	Microphone style jack (6DA)			
Transmitters		Gen. Purpose	L	Aluminum w/ hinged cover (6L)
8H	Isolated transmitter		M	Aluminum w/ screw cover & chain (6M)
8N	Non-isolated transmitter		R	Aluminum w/ hinged high dome cover (6R)
8I	Hart protocol		N	Cast Iron w/ screw cover (6N)
8E	Intrinsically safe		Q	Black plastic (6Q)
8D	Hart/intrinsically safe		SS	316 SS w/ screw cover & chain (6SS)
8PS	Indicating with SS Exp. housing		Other	
8PA	Indicating with Alum Exp. housing		A	Bare ends
<b>Note:</b> Add span range after transmitter selection. Example: 8H(0-200C). Transmitter output=4-20mA. (See section 8 for other options).		K	Spade lugs (6SL)	
		O	Open terminal block (6B4)	
		X	Other, specify	

#14	OPTIONS Use only if applicable [INTRODUCTION]				
Marking / Tagging		Calibration Options	Certifications		
1	Stainless steel tag	5	Calibrate at specified point(s). Corrections data provided for each point.	8***	Guide 17025 calibration certification
2	Plastic tag	5L*	Standard lot calibration	M	MTR (sheath / tubing / measuring junction components)
3	Paper tag	5M	Material calibration report.	Other Options	
4	Laser etch on probe	6**	Premium calibration report. Corrections data will be provided for temperatures within the range.	B	Head mounting bracket
7	CE marking [page XV]	6L	Premium lot calibration report. Corrections data will be provided for temperatures within the range.	S	Ship straight (Do not coil)
T	Calibration Tag			X	Other, specify

\* AMS 2750D/E/F compliant  
 \*\* Must specify increments & range (Example: 0 to 300°F, 10° increments)  
 \*\*\* Must choose calibration option other than 5M

COMPLETE PART NUMBER EXAMPLES
• With nipple-union-spring-loaded extension assembly: <b>1J1BHG12"S[UN6H1]PZZZL1</b> • Without extension assembly: <b>1J1BHG12"SPZZZL1</b>

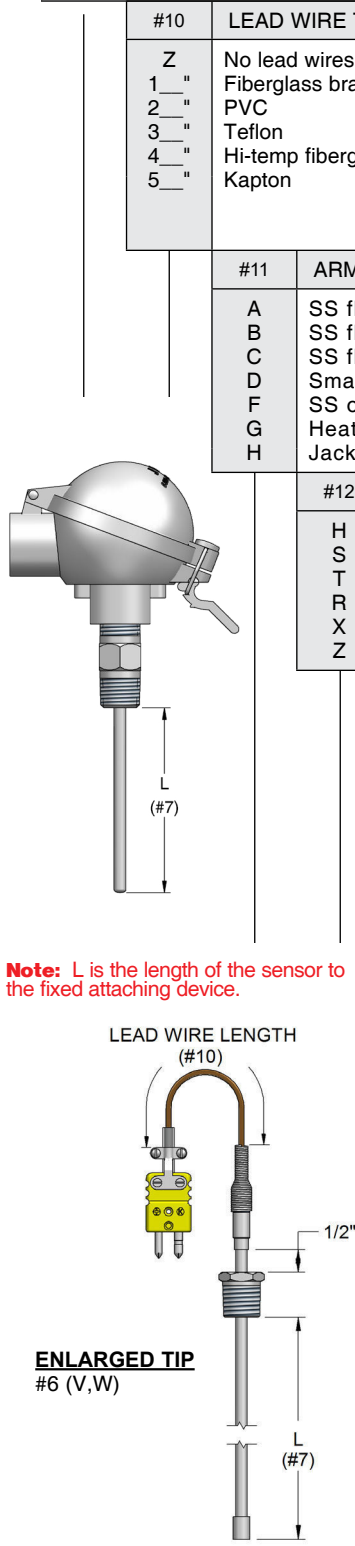

P	Z	Z	Z	L	1
---	---	---	---	---	---

# CUSTOM NIPPLE/UNION EXTENSION CONFIGURATOR

An extension assembly provides extra length extending the sensor head past insulation and away from heat. Standard unions are 1/2" FNPT on both ends. The union joins two nipples in an extension assembly and has a standard pressure rating of 150 PSIG.

When a nipple-union-nipple assembly is selected and spring-loading of the thermocouple element is required, there are two different methods of spring-loading the sensor. JMS's standard, recommended method is to use the machined 1/2" x 1/2" NPT spring-loaded stainless steel fitting as one of the nipples. With this design, the probe is secured within the fitting and mounted to the head in a rigid manner instead of spring-loading against a terminal block, as is the case with a standard nipple-union-nipple. Due to stress exerted by spring, selection #8, option N "nipple" should never be used with an in-head transmitter. Any of the other options within option #8 are compatible with in-head transmitters.

**Notes:**

- The standard JMS spring designed specifically for a 1/4" OD sensor is made of high nickel proprietary spring wire which allows users to successfully maintain 1/2" of spring-loading even up to 1000°F.
- Spring-loaded extension assemblies should not be used with ceramic protection tubes.

		#8	COLD SIDE STANDARD INDUSTRIAL ATTACHING DEVICE [1-3, 6-13]		
		X	Other, specify		<p>STANDARD ATTACHING DEVICE (ALREADY SELECTED IN #8)</p>
		Welded design	G	Single Thread (Process)	
			W	Double Threaded	<p>MOST COMMON</p> <p>** L is the overall length of the sensor to the fixed attaching device. Page 1-1, selection #7 for T/Cs or 3-1, selection #6 for RTDs.</p>
		Compression design	H2	SS w/ SS ferrule	
			I2	SS w/ Teflon ferrule	
			J2	SS w/ Lava ferrule	
			K2	SS w/ Nylon ferrule	
			L2	Brass w/ Brass ferrule	
		Spring-loaded design	D	Single threaded	
			C	Double threaded w/ oil seal	
			A	Double w/ threaded retainer	
			N	Nipple (spring-loaded against terminal block)	
			S	Double threaded	
			B	Double threaded Bayonet	
			BS	Double threaded Bayonet w/ oil seal	
			BD	Single threaded Bayonet	
			BDS	Single threaded Bayonet w/ oil seal	
		#8.1	UNION		<p>UNION (#8.1)</p>
		U	Union		
		O	Coupling		
		X	Other, specify		
		<p><b>Note:</b> Thread adapters may be used when symbol #9 is not 1/2" NPT.</p>			
		#8.2	PROCESS FITTING (MALE)		<p>PROCESS FITTING (#8.2)</p>
		N	Nipple		
		X	Other, specify		
		Z	N/A (female thread)		
		<p><b>Note:</b> Thread adapters may be used when symbol #9 is not 1/2" NPT.</p>			
		#8.3	N LENGTH		<p>N (#8.3)</p>
		"	Specify (Inches)*		
		Z	N/A (female thread)		
		<p>* ONLY for configurations with nipples (option N for selection #8 or #8.2) ALL other configurations have fixed lengths and this selection is not applicable.</p>			
		#8.4	UNION and/or NIPPLE MATERIAL		<p>Continue on to the "PROCESS NPT" selection to finish creating your sensor part number. Selection #9 on page 1-2 (thermocouples) and 3-2 (RTDs).</p>
		H	304 stainless steel	X	
		K	316 stainless steel		
		C	Black steel		
		G	Galvanized steel		
		#8.5	UNION PRESSURE RATING		
		1	#150 - A351 spec (Standard)	} ASTM	
		2	#3000 - A182 spec		
		3	#6000 - A182 spec		
		X	Other, specify		

**Note:** High nickel proprietary spring material is rated to 1000°F. (For 1/4" Ø sensors)

S { U N 6" H 1 }

# ADDITIONAL TERMINATIONS

**COLD END TERMINATION** [SEE SECTION 6] Choose as many as applicable **(JMS part number prefixes are shown in parenthesis)**

**Connectors**

<b>Plugs</b>		<b>Jacks</b>	
B	Miniature plug (6A1B)	D	Miniature jack (6A1D)
BH	Miniature high temperature plug (6A2B) <800°F	DH	Miniature high temperature jack (6A2D) <800°F
C	Standard plug (6A1C)	E	Standard jack (6A1E)
F	Standard high temperature plug (6A2C) <800°F	G	Standard high temperature jack (6A2E) <800°F
WM	Microphone style plug (6DA)	WF	Microphone style jack (6DA)
WA	Solid pin plug, heavy duty (6A3C)	WB	Solid pin jack, heavy duty (6A3E)
WC	Jab in plug (6A4C)	WD	Jab in jack (6A4E)
WE	Ultra high temperature plug, glazed (6A5C) <1200°F	WG	Ultra high temperature jack, glazed (6A5E) <1200°F
WH	Ultra high temperature plug, unglazed (6A7C) <1200°F	WI	Ultra high temperature jack, unglazed (6A7E) <1200°F
WJ	Low noise plug (6A6C) <425°F	WK	Low noise jack (6A6E) <425°F
WL	DIN-IEC microphone plug (6DB)	WN	DIN-IEC microphone style jack (6DB)
V	Molded/water resistant plug (6DC)	VF	Molded/water resistant jack (6DC)
Y	M12 Male connector (6DY)	YF	M12 Female connector (6DY)
WQ	Miniature locking plug (6A8B2)	WR	Miniature locking jack (6A1DL2)
WS	Standard plug, locking (6A8C2)	WT	Standard jack, locking (6A8E2)


**Heads** [6-1] Visit [www.JMS-SE.com/headspecs](http://www.JMS-SE.com/headspecs)

<b>Explosion Proof</b>	
I	Aluminum, NEMA 4X, FM, CSA, IP68 (6IA)
J	316 stainless steel, NEMA 4X, FM, CSA, IP68 (6ISS)
P	Aluminum, NEMA 4X, FM, CSA, ATEX, IECEx, IP68 (6IAIEC)
U	316 stainless steel, NEMA 4X, ATEX, IP68 (6ISSATEX)
SI	Cast Iron, NEMA 3, 4, UL, CSA (6I)
GA	Aluminum, screw cover w/ indicating window, NEMA 4X, ATEX, IECEx, FM, CSA, IP68 (688A1)
GS	316SS, screw cover w/ indicating window, NEMA 4X, ATEX, IECEx, FM, CSA, IP68 (688S1)

<b>General Purpose</b>	
L	Aluminum w/ hinged cover (6L)
M	Aluminum w/ screw cover & chain (6M)
R	Aluminum w/ hinged high dome cover (6R)
N	Cast Iron w/ screw cover (6N)
Q	Black plastic (6Q)
SS	316 stainless steel w/ screw cover & chain (6SS)
WP	White plastic, screw cover, Sanitary (6WP)
SB	Nickel plated, cylinder style, 1/4" NPT (6S250)
SD	Nickel plated, cylinder style, 1/8" NPT (6S125)
SC	Stainless steel, socket cap style
ST	Molded plastic, mini head, 1/4" NPT, < 350F (6T)
SU	Molded plastic, mini head, 1/4" NPT, < 800F (6U)

*Some applications may have pre-existing threaded pipes or protection tubes where no attaching device is needed to make sensor connection. In such a case, length will be measured from the base of the head.*

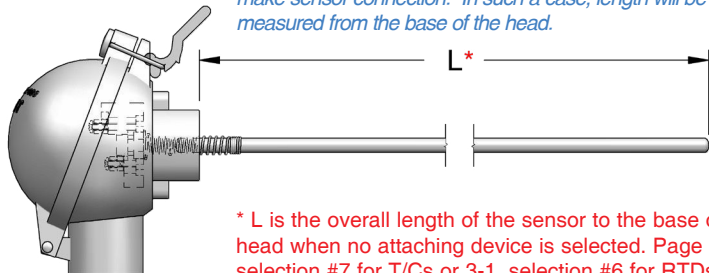


**\* L is the overall length of the sensor to the base of the head when no attaching device is selected. Page 1-1, selection #7 for T/Cs or 3-1, selection #6 for RTDs.**

**Transmitters [ 8-1 to 8-3 ]** **Notes:** - Add span range after transmitter selection. Example: 8H(0-200C).  
- Transmitter output = 4 - 20 mA. (See section 8 for other options).

8H	Isolated transmitter	8PA	Explosion proof, IP66/IP68, NEMA 4X, ATEX/IECEx, FM/CSA, Aluminum, threaded cap with glass viewing window, touch programmable [ 8-2 ]
8N	Non-isolated transmitter		
8I	Hart Protocol	8PS	Explosion proof, IP66/IP68, NEMA 4X, ATEX/IECEx, FM/CSA, 316 SS, threaded cap with glass viewing window, touch programmable [ 8-2 ]
8E	Intrinsically safe		
8D	Hart/Intrinsically safe		
8M	Integral transmitter (see page 3-5)		<b>RTDs ONLY</b>

**Other**

A	Bare ends		
K	Spade lugs (6SL)		
RL	Ring lugs (6RL)		
O	Open ceramic terminal block, brass screw terminal (6B)		
OA	Open Bakelite terminal block, nickel plated screw terminal (6BB)		
OB	Open ceramic terminal block for sensors with bayonet style connection, brass screw terminal (6B or 6C)		
OG	Ceramic terminal block, brass screw terminal (6G)		
OP	Pluggable polyimide terminal block, nickel plated screw terminal (6PT)		
OS	Open ceramic terminal block, nickel plated solder terminal (6C)		
CG	Cord connector/grip, aluminum 1/2" NPT (6CC)		
TB	Conduit bushing, 3/4" NPT male X 1/2" NPT female, plated steel (6IRB)		
X	Other, specify		

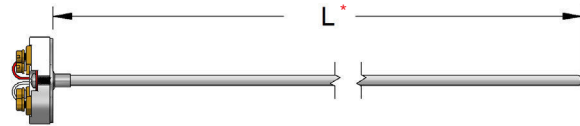

**\* L is the overall length of the sensor to the base of the terminal block mounting plate when open terminal block cold end termination is selected without a fixed attaching device. Page 1-1, selection #7 for T/Cs or 3-1, selection #6 for RTDs.**

# RESISTANCE TEMPERATURE DEVICES (RTDS)

#1	DESCRIPTION					
3	RTD					
#2	ELEMENT TYPE [3-4, 9, 10, 11, 15, 18, 22, 24]		100 Ω Platinum 0.00385 alpha (Ω/Ω°C) unless otherwise stated			
B	Resistor Accuracy at 0°C		Thermometer Class [pg. 3-18]	Resistor Class [pg. 3-18]		
E	± 0.30°C (Competitor's Std)		B	≥ F 0.3		
P*	± 0.15°C (Standard)		A	≥ F 0.15		
S*	± 0.06°C		AA	≥ 1/2 F 0.1		
N	± 0.03°C (Best Accuracy)		1/4 A	≥ 1/10 W 0.3		
M	± 0.74°C (120 Ω Nickel α=0.00672)		Non-Standard	Non-Standard		
X	± 0.30°C (1000 Ω)		B	≥ F 0.3		
X	Other, specify [3-22]		--	--		
#3	ELEMENT CONSTRUCTION [4]					
S	Single	Standard construction	SV	Single	High vibration construction	
D	Dual	Standard construction	DV	Dual	High vibration construction	
J	Single	Swaged construction				
K	Dual	Swaged construction				
X	Other, specify		<b>Note:</b> Use swaged for high temperature, bendability, and/or longer than 90".			
#4	TUBE DIAMETER <b>MUST CHOOSE 1</b>		TIP CONSTRUCTION [1-13] <b>MUST CHOOSE 1</b>			
P	1/2" (.500")	D	1/8" (.125")	N	Normal, closed tip (Standard)	
A	3/8" (.375")	X	Other, specify	K	Pointed tip, 45°	
Y	5/16" (.313")	Z	N/A	M	Weld pad	
B	1/4" (.250")				O	Weld pad, removable
R	6mm (.236")				R2	Gas/Air, exposed
C	3/16" (.188")				W*	Enlarged tip
				Y2	Reduced tip	
				X	Other specify	
<b>* Provide length and enlarged diameter description when selecting this option.</b>						

[ ] Brackets indicate page numbers where additional helpful information can be found in our technical catalog. Now available online at [www.JMS-SE.com/TechnicalCatalog](http://www.JMS-SE.com/TechnicalCatalog)


#5	TUBE MATERIAL [3-11, 3-13]				
K	316 stainless steel		C	Teflon coated, stainless steel	
L	316L stainless steel		S	Titanium	
M	I-600 (Use if symbol #7 >500°F)		Q	Hastelloy C-276	
X	Other, specify				

#6	LENGTH (L) (See illustrations on pages 3-1 and 3-2 for "L" dimension)				
"	Immersion length in inches (lengths greater than 90" may be coiled for shipment)				

#7	MAX TEMPERATURE AT WHICH TIP WILL BE EXPOSED				
A	<0°C (32°F) Cryogenic = 5 Kapton				
B	<200°C (392°F) = 3 Teflon*				
C	<288°C (550°F) = 5 Kapton*				
D	<350°C (662°F) = 1 Fiberglass*				
E	<660°C (1220°F) = 4 High temperature fiberglass*				
<b>*If no transition (Z) is in symbol 13, we recommend these corresponding selections for primary wire insulation on hollow tube sensors.</b>					

NEW Skip to page 1-3 to complete selection #8 if your sensor requires a nipple and/or union extension.

#8	STANDARD INDUSTRIAL ATTACHING DEVICE [1-3, 6-13]				
X	Other, specify				
Z	N/A		No attaching device		
G	Single thread (process)		Welded design		
F	Single thread (reversed)				
W	Double threaded				
H*	SS w/ SS ferrule		Compression design		
I*	SS w/ Teflon ferrule				
J*	SS w/ Lava ferrule				
K*	SS w/ Nylon ferrule				
L*	Brass w/ Brass ferrule				
D	Single threaded (process)		Spring-loaded design		
C	Double threaded w/ oil seal				
A	Double w/ threaded retainer				
E	Adjustable spring				
S	Double threaded (most common)				
B	Double threaded bayonet				
BS	Double threaded bayonet w/ oil seal				
BD	Single threaded bayonet				
BDS	Single threaded bayonet w/ oil seal				
<b>Note:</b> High nickel proprietary spring material is rated to 1000°F (for 1/4" Ø sensors)					

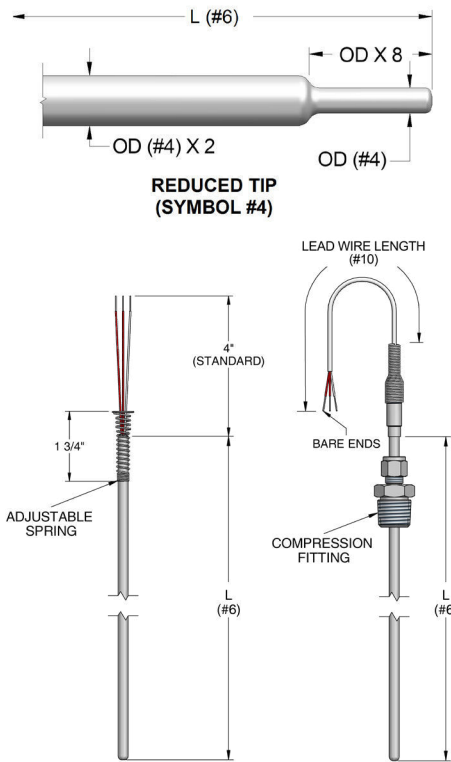

Note: L is the overall length of the sensor to the transition, wire, plug, head, or fixed attaching device. L excludes non-fixed attaching devices.

3	E	S	BN	K	12"	B	S	}	S	U	N	6"	H	1
SEE PAGE 1-3														

# RESISTANCE TEMPERATURE DEVICES (RTDS)

#9	PROCESS CONNECTION SIZE & TYPE [3]		
L	1/8" NPT	O	3/4" NPT
M	1/4" NPT	X	Other, specify
A	3/8" NPT	Z	N/A
P	1/2" NPT (Standard)		

**Note:** Threaded bushing may be used for sizes larger than 1/2"


#10	LEAD WIRE TYPE & LENGTH IN INCHES [see section 7]		
1"	Fiberglass braid	X"	Other, specify
3"	Teflon (Standard)	Z"	N/A
4"	High temperature fiberglass braid		
5"	Kapton (Standard for Cryogenic)		

**Note:** All wire in tubes > 1/8" OD will be 24 AWG. Smaller tubes will have a max. of 28 AWG. If no transition or armor is specified, wire may be fragile. JMS standard lead wire for RTDs is stranded plated copper.


#11	ARMOR OR HEAT SHRINK/JACKET [7-7]		
A	SS flex armor (Standard)	G	Heat shrink/sleeving
B	SS flex armor Teflon coated white	H	Jacket to match primary insulation
C	SS flex armor Teflon coated black	J	Aluminum Mylar shielded and jacketed to match primary insulation
D	1/8" ID SS flex armor	Z	N/A
F	SS overbraid	X	Other, specify

#12	WIRE CONFIGURATION [17, 18]		
T	2 Wire	<b>Note:</b> Use a double symbol for 2 separate multiconductor lead wires, if dual elements. For example, TT.	
Y	3 Wire		
W	4 Wire		

#13	TYPE OF TRANSITION [14]		
H	Heat shrink	<b>Note:</b> For high humidity/moisture environments (≤ 500°F), put a 2 after your selection. For example, R2.	
S	Size on size		
T	3/8" OD	<b>Note:</b> For high temperatures at the transition area (500°F to 1200°F), put a 3 after your selection. For example, T3.	
R	1/4" OD		
Q	Cuttable (Std construction only) [3-12]		
X	Other, specify		
Z	No transition		

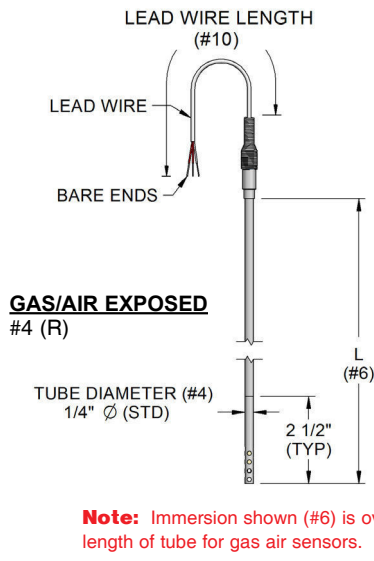

#14	COLD END TERMINATION [Additional options see Pg 1-7] Choose all that apply				
	Connectors	Heads [6-1] Visit <a href="http://www.JMS-SE.com/headspecs">www.JMS-SE.com/headspecs</a>			
B	Miniature plug	Exp. Proof	I	Aluminum, NEMA 4X, FM, CSA, IP68 (6IA)	
C	Standard plug		J	316 SS, NEMA 4X, FM, CSA, IP68 (6ISS)	
F	High temp plug (< 800°F)		P	Aluminum, NEMA 4X, FM, CSA, ATEX, IECEX, IP68 (6IAIEC)	
WM	Microphone style plug		U	316 SS, NEMA 4X, FM, ATEX, IECEX, IP68 (6ISSATEX)	
D	Miniature jack		Gen. Purpose	L	Aluminum w/ hinged cover (6L)
E	Standard jack			M	Aluminum w/ screw cover & chain (6M)
G	High temp jack (< 800°F)	N		Cast Iron w/ screw cover (6N)	
WF	Microphone style jack	Q		Black plastic (6Q)	
V	Water resistant plug	R	Aluminum high dome w/ hinged cover (6R)		
Y	M12 Water resistant plug	SS	316 SS w/ screw cover & chain (6SS)		

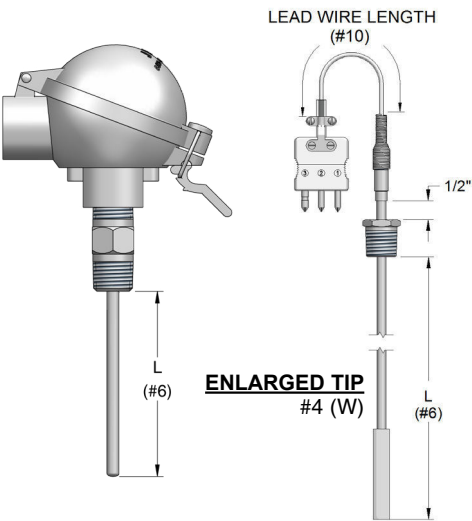

Transmitters		Transmitter & Housing [See Pg. 8-2]	
8H	Isolated transmitter	8PS	Indicating with SS housing
8N	Non-isolated transmitter	8PA	Indicating with aluminum housing
8I	Hart Protocol	Other	
8E	Intrinsically safe	A	Bare ends
8D	HART / Intrinsically safe	X	Other, specify
8M	Integral transmitter (see page 3-5)		


**Note:** Add span range after transmitter selection. Example: 8H(0-200C).

#15	OPTIONS (Use only if applicable)		
1	Stainless steel tag	6C*	Premium calibration report.
2	Plastic tag		Callendar-Van Dusen coefficients will be provided for all
3	Paper tag		CE marking [page XV]
4	Laser etch on probe	7	Guide 17025 calibration
5	Calibrate at specified point(s)	8	MTR (Sheath, tubing, tip)
	Corrections data provided for each point.	M	Calibration tag
		T	
6*	Premium calibration report. Corrections data will be provided for all		

\*Must specify increments & range (Example: 0 to 300°F, 10° increments)

### COMPLETE PART NUMBER EXAMPLES

-with nipple-union-spring-loaded fitting extension assembly:  
**3ESBNK12"BS[UN6H]PZZYZL1**  
 -without extension assembly:  
**3ESBNK12"BSPZZYZL1**



# METAL PROTECTION TUBES

#1	DESCRIPTION		
5P	Metal Protection Tube -- Add a W here for a Brass Cap and stainless steel chain attached to the well (Example 5PW)		
#2	RESPONSE TYPE (see illustrations below)		
1	Fast Response Tip		
2	Standard Response Tip		
#3	ATTACHING DEVICE		
K	Stainless steel bushing	F	Fixed flange
Z	None	T	Threaded flange
J	Adjustable floor flange	X	Other, specify

**NEW**  
for Fixed Flanges  
and Bushings!

Complete selection #s 3.1 through 3.4 below as applicable if your protection tube requires a bushing, fixed flange or threaded flange. Otherwise skip to selection #4.

#3.1	Attaching Device Size	Bushing External Thread	Flange ASME B16.5		Attaching Device Size	Bushing External Thread	Flange ASME B16.5
1	1/2"	1/2" NPT	1/2" NPS	6	3"	3" NPT	3" NPS
2	3/4"	3/4" NPT	3/4" NPS	7	1 1/4"	1 1/4" NPT	1 1/4" NPS
3	1"	1" NPT	1" NPS	8	1/4"	1/4" NPT	N/A
4	1 1/2"	1-1/2" NPT	1 1/2" NPS				
5	2"	2"NPT	2" NPS	X	Other, specify. Bushing specified? Proceed to #4		

#3.2 FLANGE PRESSURE CLASS PER ASME B16.5 (If bushing, leave this option blank)

A	150#	D	600#	G	2500#
B	300#	E	900#	X	Other, specify
C	400#	F	1500#	[blank]	Bushing



#3.3 FLANGE FACING (If bushing, leave this option blank)

1	Raised	X	Other, Specify
2	Flat	[blank]	Bushing



#3.4 FLANGE MATERIAL (If bushing, leave this option blank)

K	316 SS	J	310 SS	X	Other, specify
H	304 SS	Q	Hast. C-276	[blank]	Bushing
G	Carbon Steel	T	446 SS		
M	1600	X	Other, Specify		

**PROCEED TO SELECTION #4, PAGE 5-6 TO COMPLETE YOUR PART NUMBER**

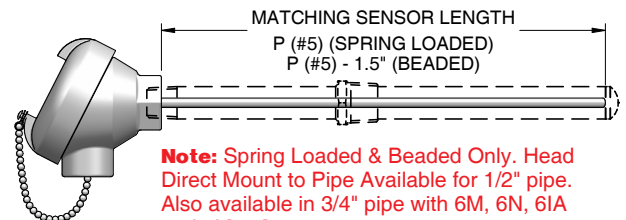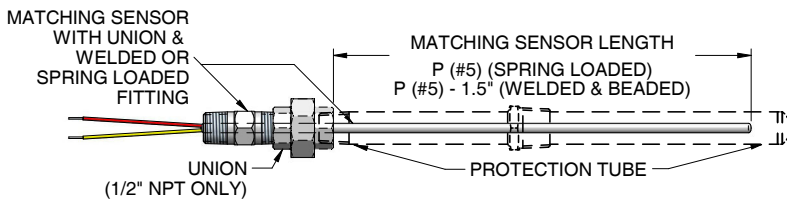

**Note:** Spring Loaded & Beaded Only. Head Direct Mount to Pipe Available for 1/2" pipe. Also available in 3/4" pipe with 6M, 6N, 6IA and 6I [8-1]

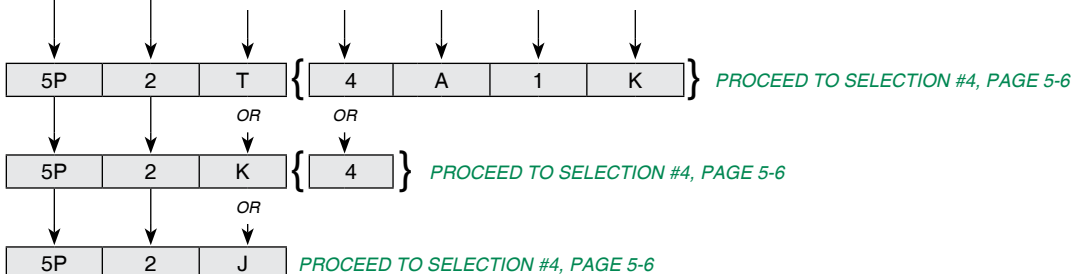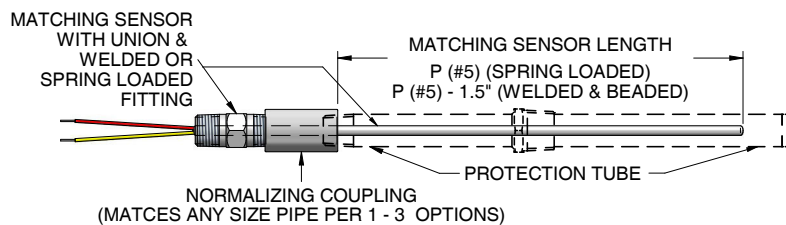

# METAL PROTECTION TUBES

#4	PIPE SIZE (NOMINAL) add "S" for SCH80 add "SS" for SCH160	Is Bushing Size Compatible with Pipe Size?				
		Bushing Size				
		1/4" NPT	1/2" NPT	3/4" NPT	1" NPT	1 1/4" NPT
18	1/8"	Yes	Yes	Yes	Yes	Yes
14	1/4"	No	Yes	Yes	Yes	Yes
12	1/2" (std)	No	No	Yes	Yes	Yes
34	3/4"	No	No	No	Yes	Yes
10	1"	No	No	No	No	Yes

#5	OVERALL LENGTH (P) (see illustrations below)			
P__"	State overall length (P) in inches		D	30"
A	12"		E	36"
B	18"		F	48"
C	24"		G	60"

#6	FIXED OR ADJUSTABLE MOUNTING METHOD & U LENGTH			
U__"	State U dimension in inches. (Only if using a permanently fixed mounting device)		Z	N/A Attaching device will be adjustable


#7	PROTECTION TUBE MATERIAL				
K	316 SS	J	310 SS	M	Inconel 600
H	304 SS	Q	Hastelloy C-276	X	Other Specify
G	Carbon Steel	T	446 SS		

For more material options, consult your sales representative directly.


  

#8	OPTIONS & TAGGING (Select as many as applicable)			
1	Tag # stamped on protection tube		X	Other, Specify.
M	MTR			

**STYLE 5P2Z**

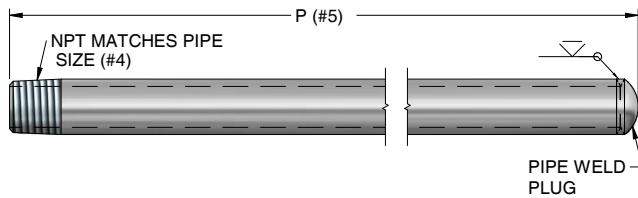


**STYLE 5P2K**

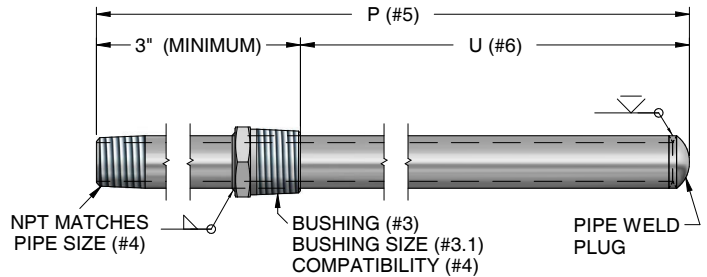

**STYLE 5P1J**

**FAST RESPONSE TIP WITH ADJUSTABLE FLOOR FLANGE**

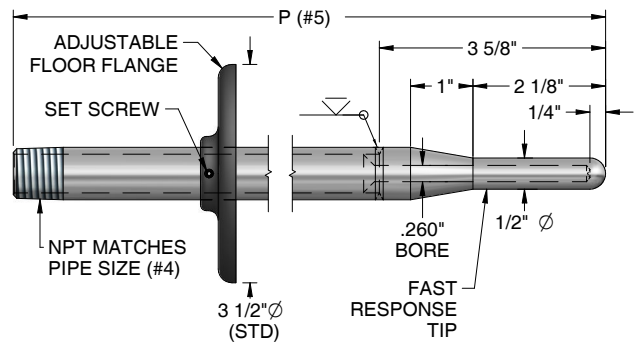

12    P36    Z    K    M1