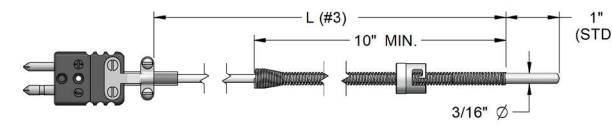


# SPRING ADJUSTABLE DEPTH SENSORS

#1	DESCRIPTION			
2Q	Spring adjustable depth bayonet sensor with SSOB fiberglass leadwire			
#2	SENSOR TYPE			
J K T	Iron/Constantan (Standard) Chromel/Alumel Copper/Constantan	E 3 X	Chromel/Constantan 100Ω Platinum RTD 0.00385 alpha (3 wire) Class B Other, specify	
#3	LEAD WIRE LENGTH			
48"	Length in inches	Note: Length measured from front of spring to back of cable clamp.		
60"	Length in inches			
L_ "	Length in inches			
#4	JUNCTION			
G U	Grounded (Standard) Ungrounded common (RTDs are always ungrounded)			
#5	COLD END TERMINATION		[Additional options see Pg 1-7]	
A C E	Bare ends (Standard) Standard plug Standard jack	K T X	Spade lugs (compensated) Junction box connector Other, specify	
#6	TAGGING AND CALIBRATION OPTIONS		(use only if applicable)	
—	See page 1-2 #14 for ordering selections.			

W. T. Maye, Inc. (WTMI) / 1-877-705-9864 / info@wtmi-usa.com / www.wtmi-usa.com